


## DROP CABLE - TIGHT BUFFER (ROUND FIG-8 TYPE)

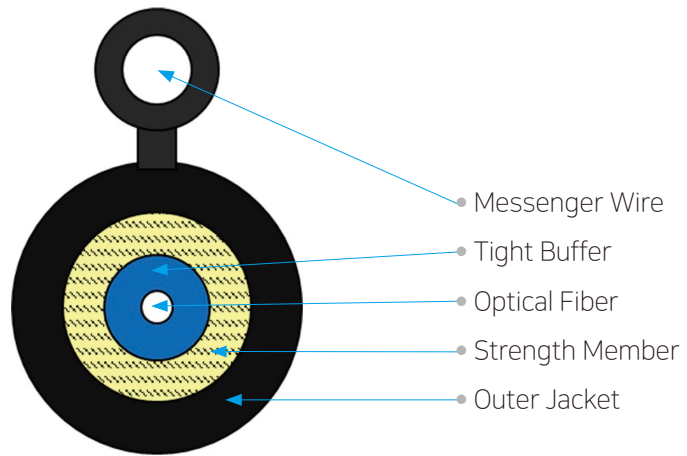

### Description

FTTH Drop Cable will be directly connected till end user home, the bandwidth, wavelength and transmission technology are not restricted. There is one messenger wire with polyester yarn, steel or steel strands for supporting in aerial mounting. It is quite popular now on market.

#### Application

House wiring, Lead-in cable  
FTTx network

### Features & Benefits

- Simple structure, light weight, good bending, and high practicability
- Good tensile performance
- Durable sheath

### Technical Data

Fiber Count		1
Buffer Diameter(μm)		900
Outer Diameter(mm)		3.0 x 5.0
Weight(kg/km)		14
Max. Pulling Tension(N)		900
Min. Bend	Installation	20 times cable outer diameter
Radius(mm)	Operation	10 times cable outer diameter
Temperature	Installation	- 30°C ~ + 60°C
	Operation	- 40°C ~ + 70°C

※ The drawing and data appearing on this page may be subject to change or modification without any prior notice